



Praetorian Guard


IP Video Intercom



Long Range Antenna (2.4GHz)
(up to 60m working range depending on
router type and location)!

Existing Wi-Fi Hub

New Praetorian APP

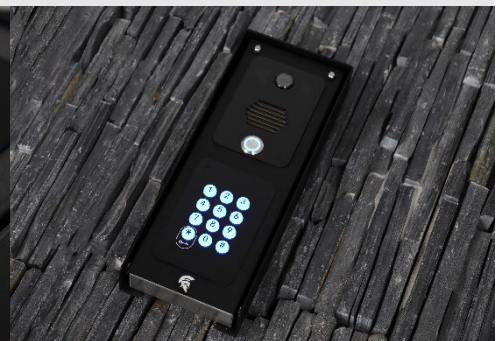


- **Speak to your visitors from anywhere in the world.**
- Grant access remotely - Send a command to the gate motor via the app to open your gates etc.
- Keypad Codes – 24-7 / Timed / Temporary (Optional)
- No Touch Access - PROX Cards/ Tags - 24-7 / Timed / Temporary (Optional)
- Voicemail - Visitors can leave a video messages when unanswered.
- Multi-User - Add up to 8 maximum devices per Intercom ID. (incl ADMIN user. 4 maximum for optimal performance.)
- Connect via WiFi, LAN Cable or 4G Access Point (Sold Separately) (Dualband WIFI. 2.4 & 5.8G wifi (IEEE 802.11 b/g/n/a/c)
- Volume of external speaker adjustable at the call-point.



Installer / User App

App images for illustrative purposes only.

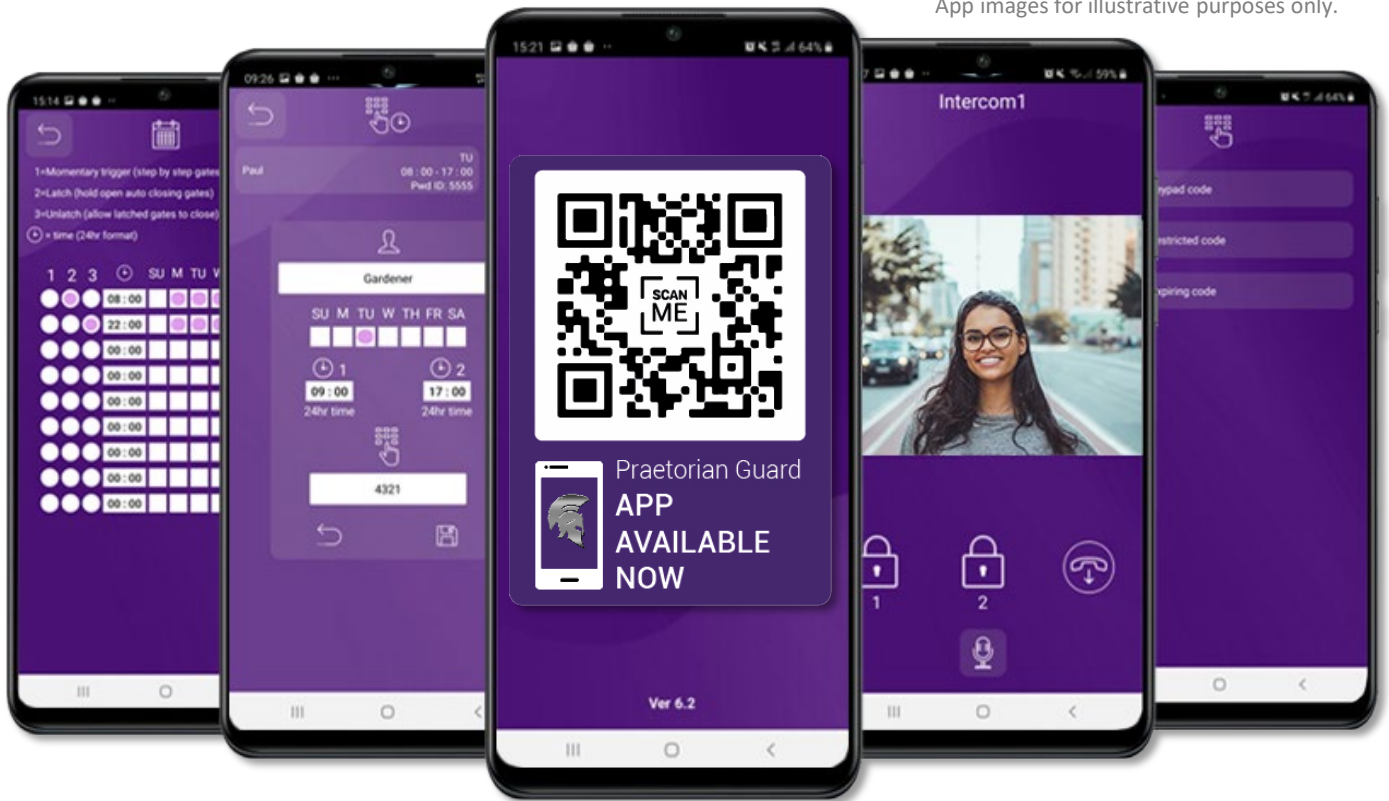

Events log for Keypad codes, Calls, Voicemails, Prox ID's. (past 100)



7-day schedule for auto relay opening.



Notifications for calling, relay triggers (prox, keypad codes, in app latching, scheduled latching/unlatching etc.





Sync device time to device.



Prox & Keypad codes added via App.





View your camera in full screen mode.




- **System can work with smartwatches however notifications may vary due to smartwatch brand & capabilities.**



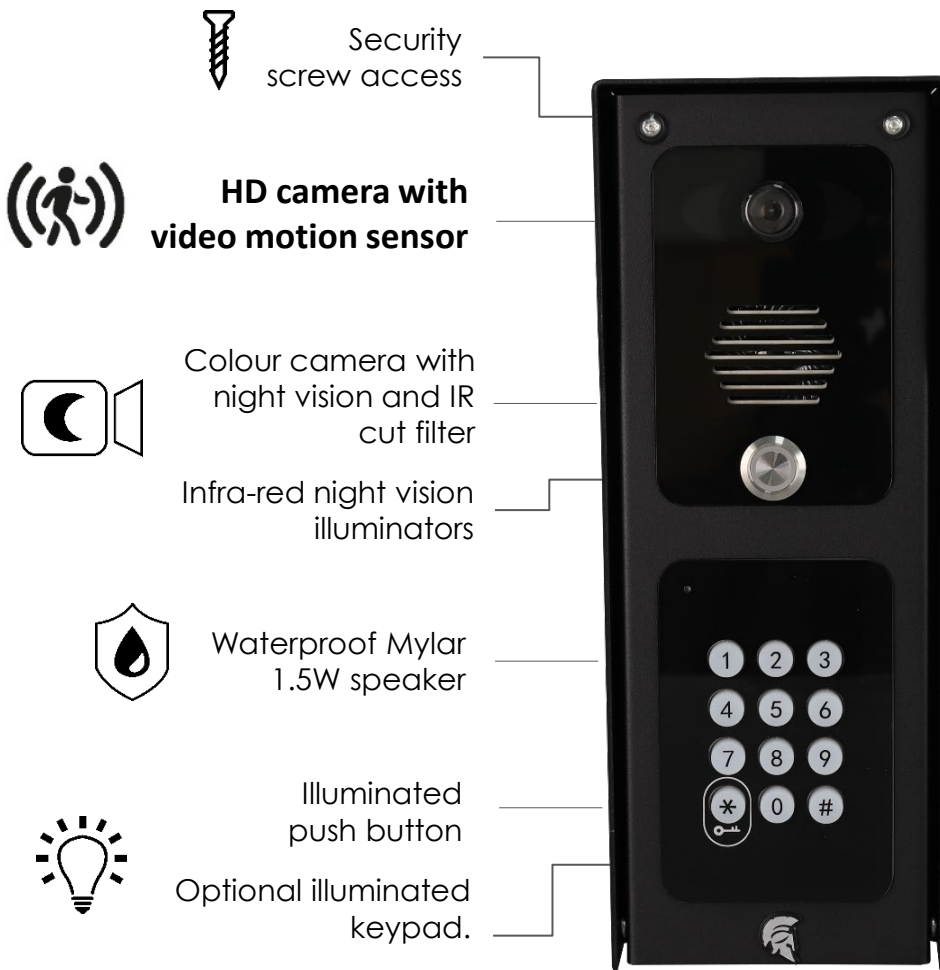


 Security screw access

 **HD camera with video motion sensor**

 Colour camera with night vision and IR cut filter

Infra-red night vision illuminators

 Waterproof Mylar 1.5W speaker

 Illuminated push button
Optional illuminated keypad.

High gain Wi-Fi antenna
60 degree transmission to concentrate & extend range. Weatherproof for outdoor use.



2.4GHz Directional Antenna with 2m RG174 cable with SMA male connector.

*Moving objects & changing weather may trigger sensor.

Technical Details			
Permanent Codes/cards	100	Relay Type	N/C and N/O
Time Restricted Codes/cards	100	Relay Load	2 amps, 24v ac max
Temporary Codes/cards	100	Power Consumption	300mA on dial out, 2amp peak demand
Event log displays	100	Modem Models	4G Europe, 4G USA, 4G AUS/NZ
App unique users	8	Wifi (Range 2.4 & 5.8ghz)	IEEE 802.11 a/b/g/n/ac
Relays	2	Power Supply	24v dc (24v dc 2A adaptor included)



GENERAL

Front Panel	<p>Portrait Orientation AB/ABK = 3mm Acrylic on Architectural Design Marine Grade Stainless Steel BS316 Front Plate. AS/ASK = 3mm Marine Grade Stainless Steel BS316 on Architectural Design Marine Grade Stainless Steel BS316 Front Plate. FS/FSK = Flush Design Marine Grade Stainless Steel BS316 Front Plate. IB/IBK = 3mm Acrylic on Imperial Design Marine Grade Stainless Steel BS316 Front Plate. Modular = Powder Coated Marine Grade Stainless Steel BS316 Front Plates with 3mm Acrylic on Design Marine Grade, Stainless Steel BS316 Modular Plates. Landscape Orientation PB = Pedestal Surface Mount</p>
Hood Cover (MOD, IMP(K), PED versions)	Powder coated Aluminium
Mounting Housing (Backbox)	Marine Grade Stainless Steel BS316
Mounting Type	Surface-Mounted with backlighting, Flush-mounted version sold separately
Call Button	Stainless-steel button with illuminated LED Ring
Weatherproof	IP55
Approvals	CE, FCC
Dimensions	See Overview of Call Points
Operating Temp.	-25 to +55°C / -13 to 131°F
Power Supply	24V DC
Power Consumption	<p>IP PCB w/Keypad & Prox Standby = 80mA Operating = 300mA</p>
Solar Power	45Watt Solar Panel (minimum) 2x 12V 15AH Batteries connected in series to provide 24V output
Connectors	LAN (RJ45) 2 x Bistable latching relay, max. 1-28V DC/AC, 1A, e.g. for magnetic door lock External input for push to exit button 24V DC input (+, -)
System Requirements	Mobile device: Newest iOS on iPhone/iPad, newest Android on Smartphone/Tablet Internet: High-Speed Landline Broadband Internet connection, DSL, cable or fibre optic, no socks or proxy server. Min. suggested upload speed of 1.5mbps, Network: Ethernet Network, with DHCP / WIFI 2.4GHz/5.8GHz (with applicable antenna)
Recommended Installation Height	Camera lens should be at a min. height of 145 cm (57 in). Before the installation please determine your optimal installation height.

KEYPAD MODULE

Power Supply	24V DC
Steel Keypad Module	12 Square Silicon Keys Blue illumination Keypad Codes configurable via App, Slave connection to allow up to an additional 8 slave devices
Silicon Keypad Module	12 Round Silicon Keys Blue illumination Keypad Codes configurable via App,

VIDEO

Camera	HD 720p, dynamic (VGA – HD)
Lens	120° (D), 109° (H), 65° (V) IR-capable
Display Resolution	Switchable in the app by the Admin user. HD resolution: 1280*720 SD resolution: 640*480
Video Codec	H264
Night-Vision	Yes, light sensor, automatic IR-cut filter, 5 Infrared LEDs
Storage	On-Board Micro SD Card (16GB included) Max read capacity 32GB Estimated capacity based on 16GB: 5,592 Video Clips (3MB) {AVI.} 33,500 images (0.5MB) {JPG} Supports Hot Swapping. Auto overwrites oldest data at 80% capacity FAT32 Formatting

MOTION SENSOR

Type	Active
Detection Type	Digital (Pixel-based) Changes of pixilation. This is processed by the CPU identifying any major/minor changes in pixels that is defined by a predetermined algorithm.
Range	>5m, depends on environment, distance is fixed

AUDIO

Audio Components	Speaker and microphone, noise reduction and echo cancellation (ANR, AEC)
Audio Streaming	Two-way, full duplex & half-duplex (switchable in-app)
Audio Codec	PCM/ARAW

NETWORK

WiFi	IEEE 802.11a/b/g/n/ac
WiFi Security	WPA / WPA2 / WPA3
Frequency Range	2.4GHz-2.4385GHz; 5.15GHz-5.845GHz
Ethernet	IEEE 802.3
Supported Protocols	HTTP, HTTPS, SSL/TLS, Bonjour, DNS, RTSP, RTP, TCP, UDP, RTCP, ICMP, DHCP, ARP



Area code:
EU (Europe)
US (USA)
AU (Australia & NZ)

IP MODULAR Intercom



PRAE-IP-MOD-IB-EU

1x1 Modular call panel with *high gain Wi-Fi* antenna. Button with modern blue lighting.



PRAE-IP-MOD-IBK-EU

1x2 Modular call panel with keypad and *high gain Wi-Fi* antenna. Keypad/button with modern blue lighting.



PRAE-IP-MOD-IBPK-EU

1x2 Modular call panel with **keypad** and **prox** reader. *High gain Wi-Fi* antenna. Keypad/button with modern blue lighting.



PRAE-IP-MOD-IBP-EU

1x2 Modular call panel with **prox** reader and *high gain Wi-Fi* antenna. Button with modern blue lighting.



MON-11-EU

Wall mount touch screen monitor compatible with the **Praetorian system**. Can be purchased as an added accessory to all above kits.



Area code:
EU (Europe)
US (USA)
AU (Australia & NZ)

PRAE-IP-EU

(Kit includes speech panel, antenna, power supply and install manual)



Contemporary white illuminated buttons.
Marine grade, brushed stainless steel construction with gloss acrylic trim and powder coated aluminium hood.

PRAE-IP-IB-MON1-EU

(Kit includes WIFI panel, antenna, 1x MON-11 Monitor and install manual)



PRAE-IP-AB-EU

(Kit includes speech panel, antenna, power supply and install manual)



Blue back lighting effect.
Marine grade, brushed stainless steel construction with gloss acrylic trim.

PRAE-IP-AB-MON1-EU

(Kit includes WIFI panel, antenna, 1x MON-11 Monitor and install manual)



PRAE-IP-AS-EU

(Kit includes speech panel, antenna, power supply and install manual)



Architectural model with contemporary white illuminated buttons.
Marine grade, brushed stainless steel construction.

PRAE-IP-AS-MON1-EU

(Kit includes WIFI panel, antenna, 1x MON-11 Monitor and install manual)





Area code:
EU (Europe)
US (USA)
AU (Australia & NZ)

PRAE-IP-IBK-EU

(Kit includes speech panel, antenna, power supply and install manual)



PRAE-IP-IBK-MON1-EU

(Kit includes WIFI Panel, antenna, 1x MON-11 Monitor and install manual)



Marine grade, brushed stainless steel construction with gloss acrylic trim and powder coated aluminium hood. Contemporary cool while illuminated buttons.
Prox panel: PRAE-IP-IBPK-EU


PRAE-IP-ABK-EU

(Kit includes speech panel, antenna, power supply and install manual)



PRAE-IP-ABK-MON1-EU

(Kit includes WIFI Panel, antenna, 1x MON-10 Monitor and install manual)

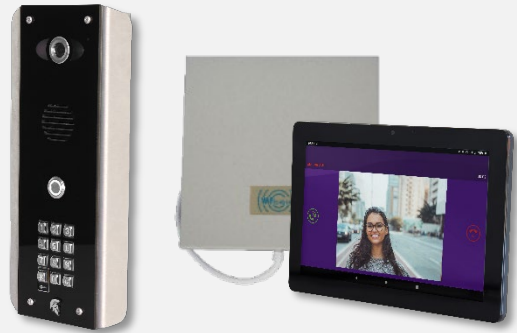

Modern blue back lighting effect.
Marine grade, brushed stainless steel construction with gloss acrylic trim.
Prox panel: PRAE-IP-PX-ABPK-EU

PRAE-IP-ASK-EU

(Kit includes speech panel, antenna, power supply and install manual)




PRAE-IP-ASK-MON1-EU

(Kit includes WIFI Panel, antenna, 1x MON-10 Monitor and install manual)




Architectural model with contemporary cool-white illuminated buttons.
Marine grade, brushed stainless steel construction.
Prox panel: PRAE-IP-ASPK-EU

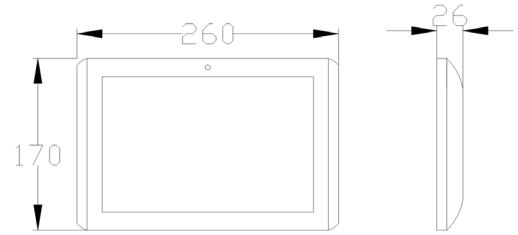


MON-11-EU

- Wall mount touch screen monitor (1280x800 Resolution), compatible with the **Praetorian system**.
- 10.1 inch screen IPS LCD android screen.
- Wifi, Ethernet & Bluetooth connections.
- POE supplied (12V DC can be purchased separately)
- Complete with wall mount bracket.
- Android OS (8.1) with Praetorian app pre-loaded.
- RK3288, Quad-core cortex A17, 1.6G.

Call Panel Dimensions

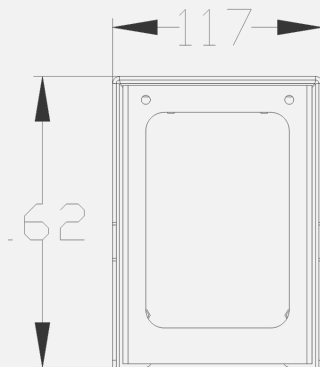


MOD-1X1 (MODULAR)

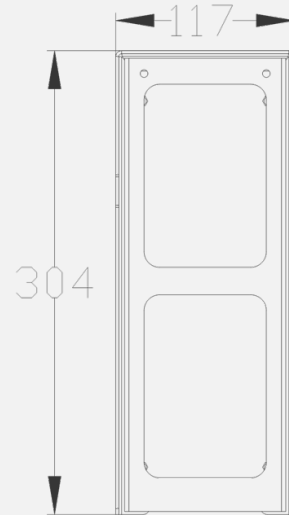


MOD-1X2 (MODULAR)

PRAE-IP-IB Call Panel

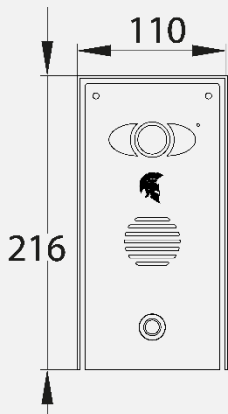

PRAE-IP-IBK Call Panel

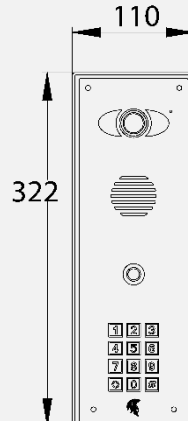

PRAE-IP-AB & AS Call Panel

