


TOTEM UNIT

Road cabinet

The road cabinet is suitable to support and for the installation of control devices for bollards or barriers in town areas with all the relative fixing accessories on DIN guides.

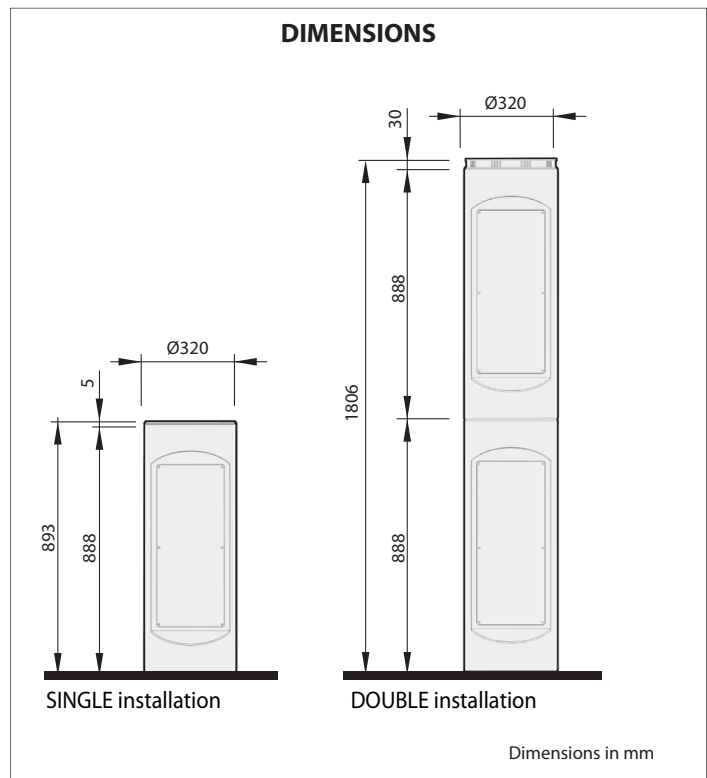

- Stackable modules.
- Housing of up to 2 PERSEO 0 control units, or 1 PERSEO CBE control unit.
- Front panels allowing inspections.
- Accessory plate extractable and ready for the installation of control unit and accessory housing.
- To completing: TOP COVERS with or without light.

TECHNICAL SPECIFICATIONS

Diameter	320 mm
Height	888 mm
Thickness	2.5 mm
Type of material	Fe 360 (S 235 JR)
Treatment	Cataphoresis, painted with a micaceous coloured polyester paint for outdoors, RAL7015 standard, other colours available upon request
Metal parts	Equipotentials
Module layout	Single or stackable
Weight	25 kg
Power consumption, idle	5 W (50Hz)
Degree of protection	IP55

ACCESSORIES

- Template to be bricked with 3 clamps;
- Panel ready for the installation of a two- or three-light unit, treated with cataphoresis and painted;
- Siren sound detector.

REFERENCE STANDARDS

2014/35/UE (EN 60335-1:2012; EN 60335-1/A11:2014; EN 60335-2-103:2015) Low voltage

2014/30/UE (EN 61000-6-3:2007; EN 61000-6-2:2005; EN 6100-6-3/A1:2011) Electromagnetic Compatibility

TOP COVERS

- Without light



Dimensions	Ø314 x th.5mm
Type of material	Fe 360 (S 235 JR)
Treatment	Cataphoresis, painted with a micaceous coloured polyester paint for outdoors, RAL7015 standard, other colours available upon request

- With light



Dimensions	Ø314 x th.30mm
Type of material	Fe 360 (S 235 JR)
Treatment	Cataphoresis, painted with a micaceous coloured polyester paint for outdoors, RAL7015 standard, other colours available upon request
Visibility active	- Highly luminous 18-LED crown, 9 red and 9 green, arranged at 360°; - 90 db buzzer complete with electronic board.

ITEM SPECIFICATION

Road cabinet with an easy access front panel, made by steel Fe 360 (S 235 JR), possibility of housing up to 2 control units. Dimensions Ø320 x h.888 mm, th. 2.5mm. IP55. Cataphoresis treatment and painted with micaceous standard for outdoors.

Available to completing:

- top cover without light, or;
- top cover with highly luminous 18-LED crown, 9 red and 9 green, arranged at 360° and 90 db buzzer complete with electronic board.

Bft Spa

Via Largo di Vico, 44 - 36015 Schio (VI) ITALY

T +39 0445 69 65 11

F +39 0445 69 65 22

info@bft.it

www.bft-automation.com



Be ahead